




KASHINOKI SOGYO CO., LTD

製品名


文字高57mm緑セグメント23101Gアノードコモン

APPEARANCE			TECHNOLOGIE	GaP
FACE	SEGMENT	PIN	SOURCE COLOR	Green
Gray	White	φ0.60x10.28	DRIVER MODE	Com.Anode
			PACKING	Tube(23101)

PACKAGE DIMENSIONS

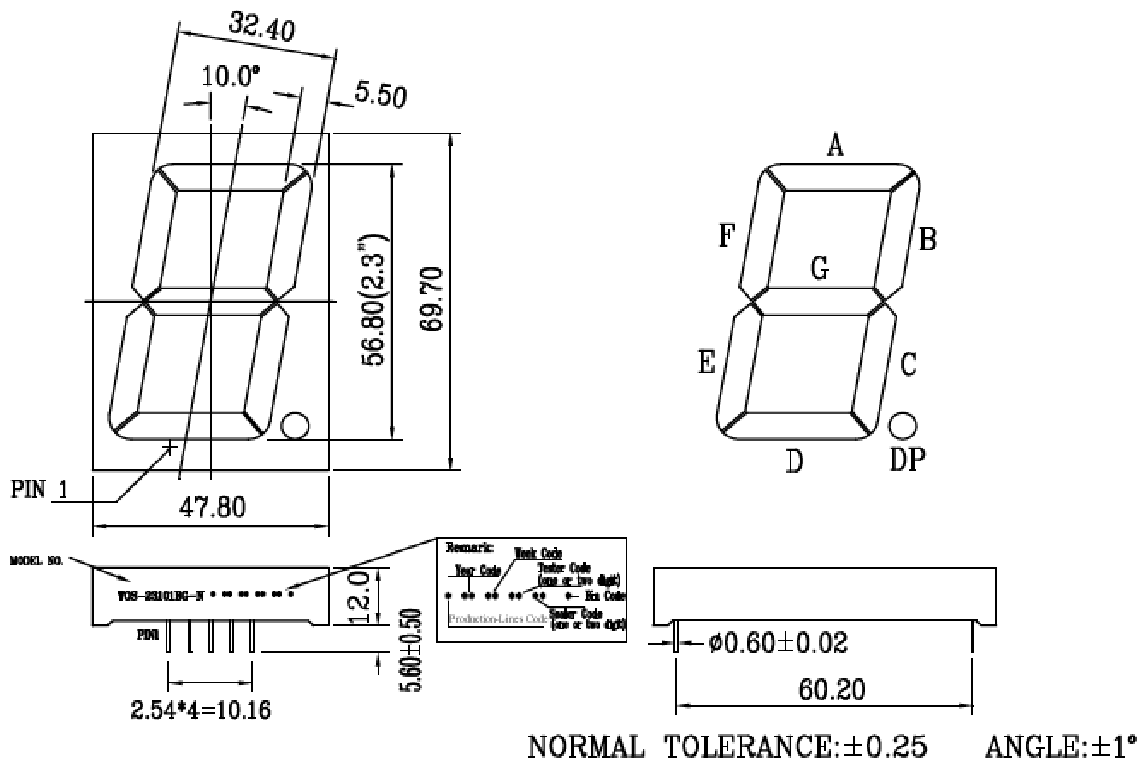

INTERNAL CIRCUIT DIAGRAM

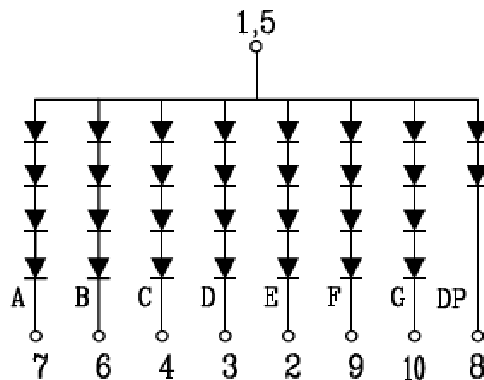



KASHINOKI SOGYO CO., LTD

製品名

文字高57mm緑セグメント23101Gアノードコモン

ABSOLUTE MAXIMUM RATINGS AT TA=25°C

PARAMETER	VALUE	UNITS
Power Dissipation Per Segment (Except Dp)	240	mW
Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width)	80	mA
Continuous Forward Current Per Segment	20	mA
Recommend Operating Current	12	mA
Reverse Voltage Per Segment	20	V
Operating Temperature Range	-25 to +85	°C
Storage Temperature Range	-30 to +85	°C
Storage Time at 25±2°C/65%RH±5%RH	6	Month
Junction Temperature	+85	°C
Lead Sold Temperature(1/16 Inch Below Seating Plane)	260°C for 3 sec.	

ELECTRICAL/OPTICAL CHARACTERISTICS AT TA=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITION	GRADE
Luminous Intensity Per Segment	I _v	3501	4113	4725	ucd	I = 10mA	H
Luminous Intensity Per Segment	I _v	4726	5435	6144	μcd	I _F = 10mA	K
Luminous Intensity Per Segment	I _v	6145	7066	7987	μcd	I _F = 10mA	M
Peak Emission Wavelength	λ _p		573		nm	I _F = 20mA	
Spectral Line Half-Width	Δλ		30		nm	I _F = 20mA	
Forward Voltage Per Segment (Except Dp)	V _F	7.6	8.8	10	V	I _F = 20mA	
Reverse Current Per Segment	I _R			20	μA	V _R = 20V	
Luminous Intensity Matching Rate	I _v -m			1.5:1		I _F = 20mA	